






Fast Connector Sockets

with pin

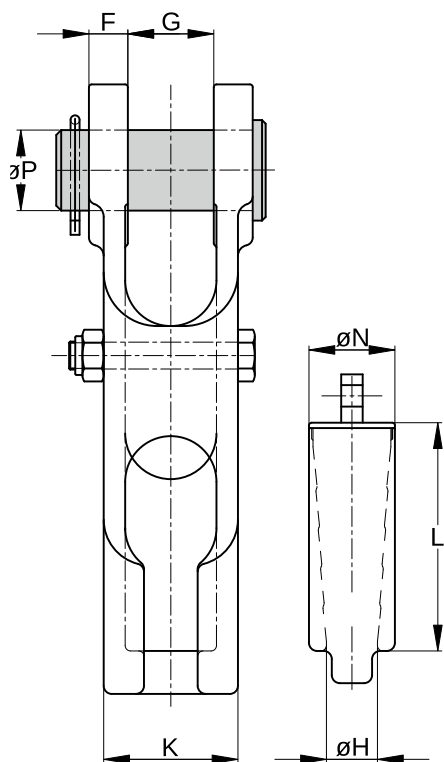

with bolt

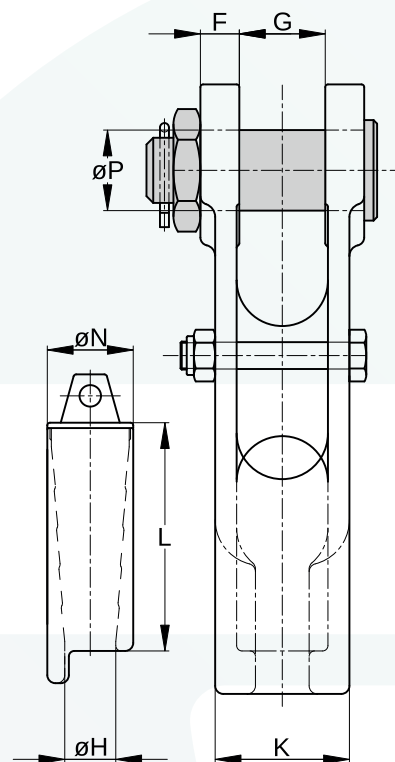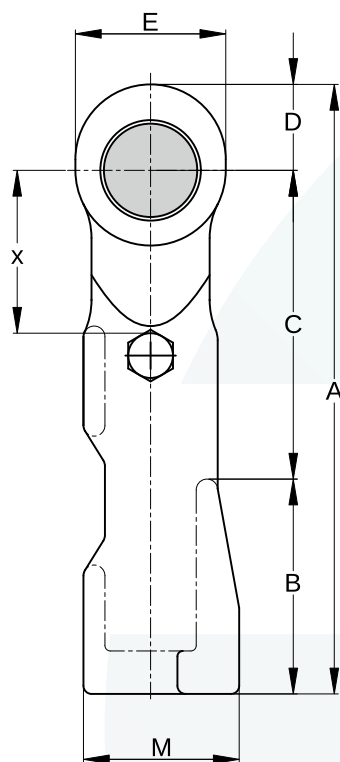

Available for wire rope sizes from $\varnothing$ 11 mm to $\varnothing$ 52 mm ($7/16''$ to 2'') with an efficiency rating of 100%. Standard version with pin and cotter pin. Also available with bolt, nut and cotter pin. Each Fast Connector Socket contains a Connector Fitting with a non-rotating device.



AQUALLINE FAST CONNECTOR SOCKET. MM DIMENSIONS

Model Number	MBL (Mtons)	For Wire Rope Ø mm	Approx. Resin Volume (cc)	Dimensions (mm)														Weight (kg)
				A	B	C	D	E	F	G	ØH	K	L	M	ØN	ØP	X	
FCS 701	20	11 - 13	35	190	65	97	28	48	12.5	26	15	40	70	47	26	25	45	1.7
FCS 702	25	13 - 16	50	227	80	115	32	56	14.5	32	19	50	84	58	32	30	58	2.6
FCS 703	40	17 - 19	80	260	90	130	40	68	16.5	38	22	60	98	70	39	35	64	3.9
FCS 704	55	20 - 22	125	303	110	145	48	80	20.5	45	26.5	69	117	80	45	41	82	6.7
FCS 705	80	23 - 26	160	365	125	182	58	98	22.5	51	29.5	80	138	93	52	51	95	10.5
FCS 706	100	27 - 29	210	400	140	195	65	110	25	57	33.5	90	157	104	58	57	97	13.5
FCS 707	120	30 - 32	350	426	150	205	72	124	28	63	36.5	98	170	111	64	63	100	19
FCS 708	130	33 - 36	425	465	170	220	76	132	28	70	40	102	183	117	68	63	110	23
FCS 709	160	37 - 39	500	502	182	240	80	140	30	76	43	110	207	125	76	70	115	41
FCS 710	200	40 - 42	700	550	200	265	85	148	33	76	48	126	230	142	85	76	125	50
FCS 711	250	43 - 48	1250	620	225	300	98	170	39	89	56	140	260	157	95	89	135	65
FCS 712	300	49 - 52	1425	685	240	335	108	186	46	101	60	157	285	175	104	95	150	80

AQUALLINE FAST CONNECTOR SOCKET. INCH DIMENSIONS

Model Number	MBL (Mtons)	For Wire Rope Ø inch	Approx. Resin Volume (cc)	Dimensions (inch)														Weight (lbs)
				A	B	C	D	E	F	G	ØH	K	L	M	ØN	ØP	X	
FCS 701	20	7/16 - 1/2	35	7.50	2.60	3.80	1.10	1.90	0.50	1.00	0.60	1.60	2.80	1.90	1.03	1.00	1.80	3.8
FCS 702	25	1/2 - 5/8	50	8.90	3.10	4.50	1.30	2.20	0.57	1.26	0.75	2.00	3.30	2.30	1.26	1.18	2.30	5.8
FCS 703	40	2/3 - 3/4	80	10.20	3.50	5.10	1.60	2.70	0.65	1.50	0.85	2.36	3.90	2.80	1.50	1.38	2.50	8.6
FCS 704	55	7/8	125	11.90	4.30	5.70	1.90	3.10	0.81	1.77	1.05	2.70	4.60	3.10	1.77	1.60	3.20	15
FCS 705	80	1	160	14.40	4.90	7.20	2.30	3.60	0.89	2.00	1.16	3.10	5.40	3.70	2.00	2.00	3.70	23
FCS 706	100	1 1/8	210	15.70	5.50	7.70	2.60	4.30	1.00	2.25	1.32	3.50	6.20	4.10	2.30	2.25	3.80	30
FCS 707	120	1 1/4	350	16.80	5.90	8.10	2.80	4.90	1.10	2.50	1.44	3.90	6.70	4.40	2.50	2.50	3.90	42
FCS 708	130	1 3/8	425	18.30	6.70	8.70	3.00	5.20	1.10	2.75	1.58	4.00	7.20	4.60	2.70	2.50	4.30	51
FCS 709	160	1 1/2	500	19.80	7.20	9.50	3.10	5.50	1.20	3.00	1.70	4.30	8.20	4.90	3.00	2.75	4.50	90
FCS 710	200	1 5/8	700	21.70	7.90	10.40	3.30	5.80	1.30	3.00	1.90	5.00	9.10	5.60	3.30	3.00	4.90	110
FCS 711	250	1 3/4 - 1 7/8	1250	24.40	8.90	11.80	3.90	6.70	1.53	3.50	2.20	5.50	10.20	6.20	3.70	3.50	5.30	145
FCS 712	300	2	1425	27.00	9.50	13.20	4.30	7.30	1.81	4.00	2.36	6.20	11.20	6.90	4.10	3.75	5.90	175

MBL = Minimum Breaking Load

All sockets are supplied with a zinc plated finish. FCS 704 - FCS 712 are also available in aqua-blue primer (RAL 5018).

For more information read our 'Warnings and instructions for use'.