






Adjustable Open Spelter Sockets

with pin

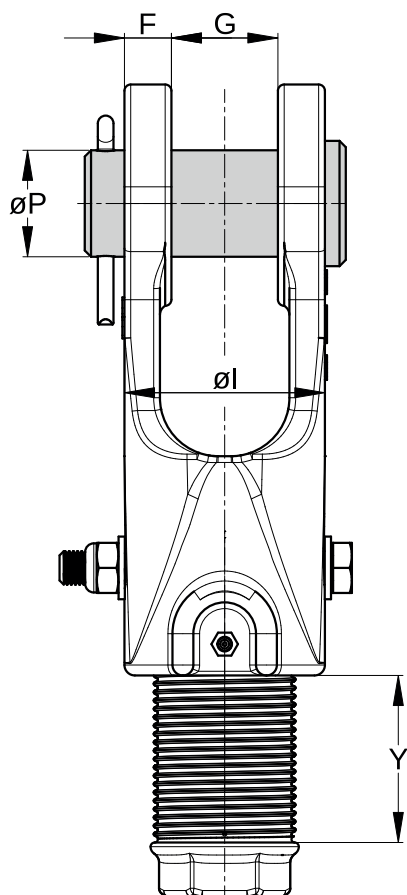

with bolt

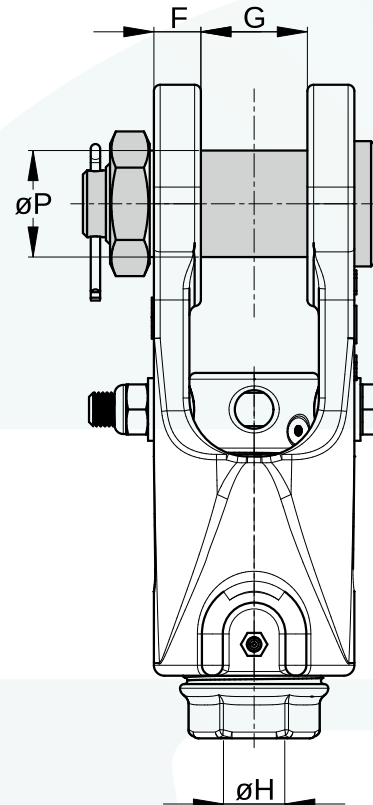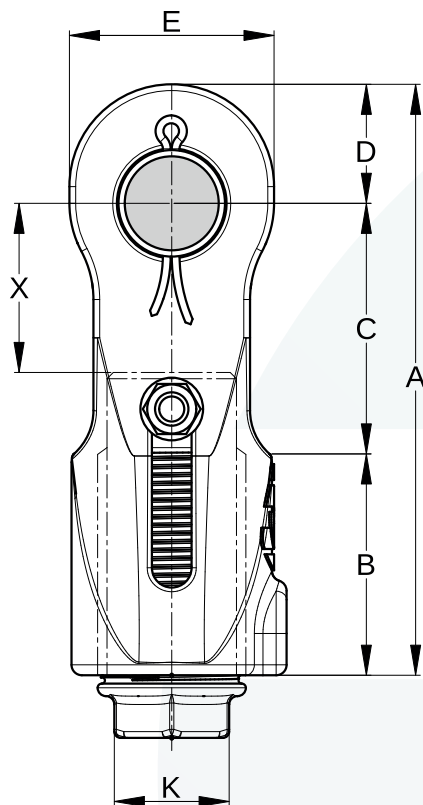

Available for wire rope sizes from $\varnothing$ 18 mm to $\varnothing$ 48 mm ($\frac{3}{4}$ " to $1 \frac{7}{8}$ ") with an efficiency rating of 100%. Standard version with pin and cotter pin. Also available with bolt, nut and cotter pin.



AQUALLINE ADJUSTABLE OPEN SPELTER SOCKET. MM DIMENSIONS

Model Number	MBL (Mtons)	For Wire Rope Ø mm	Approx. Resin Volume (cc)	Dimensions (mm)													Weight (kg)
				A	B	C	D	E	F	G	ØH	ØI	K	ØP	X	Y	
AOSS 800	40	18 - 19	80	216	80	90	45	74	16.5	38	22.5	71	41	35	60	55	5
AOSS 804	55	20 - 22	125	243	90	100	53	90	20.5	45	26.8	86	50	41	65	65	8
AOSS 808	80	23 - 26	160	289	105	120	64	108	22.5	51	29.5	96	55	51	70	75	13
AOSS 811	100	27 - 30	210	317	120	130	67	114	25	57	34	108	65	57	80	85	17
AOSS 815	130	31 - 36	350	362	135	150	77	135	28	63	40	116	75	63	90	90	23
AOSS 818	160	37 - 39	425	403	150	170	83	146	30	76	44.5	136	80	70	100	100	33
AOSS 820	200	40 - 42	500	490	165	180	89	156	33	76	48	142	90	76	110	110	40
AOSS 825	250	43 - 48	700	572	185	215	102	178	39	89	53	167	100	89	120	125	60

AQUALLINE ADJUSTABLE OPEN SPELTER SOCKET. INCH DIMENSIONS

Model Number	MBL (Mtons)	For Wire Rope Ø inch	Approx. Resin Volume (cc)	Dimensions (inch)													Weight (lbs)
				A	B	C	D	E	F	G	ØH	ØI	K	ØP	X	Y	
AOSS 800	40	3/4	80	8.50	3.15	3.50	1.75	2.90	0.65	1.50	0.90	2.80	1.61	1.38	2.40	2.20	11
AOSS 804	55	7/8	125	9.60	3.50	3.90	2.10	3.50	0.81	1.75	1.05	3.40	1.97	1.63	2.60	2.60	17.5
AOSS 808	80	1	160	11.40	4.10	4.70	2.50	4.30	0.89	2.00	1.16	3.80	2.17	2.00	2.80	3.00	25
AOSS 811	100	1 1/8	210	12.50	4.70	5.10	2.60	4.50	1.00	2.25	1.34	4.25	2.56	2.25	3.10	3.30	38
AOSS 815	130	1 1/4 - 1 3/8	350	14.30	5.30	5.90	3.00	5.30	1.10	2.50	1.60	4.56	2.95	2.50	3.50	3.50	50
AOSS 818	160	1 1/2	425	15.90	5.90	6.70	3.30	5.70	1.18	3.00	1.75	5.35	3.15	2.75	4.00	4.00	72
AOSS 820	200	1 5/8	500	19.30	6.50	7.10	3.50	6.15	1.30	3.00	1.90	5.82	3.54	3.00	4.30	4.30	88
AOSS 825	250	1 3/4 - 1 7/8	700	22.50	7.30	8.50	4.00	7.00	1.50	3.50	2.10	6.57	3.94	3.50	4.75	5.00	132

MBL = Minimum Breaking Load

All sockets are supplied with a zinc plated finish. AOSS 811 - AOSS 825 are also available in aqua-blue primer (RAL 5018).

For more information read our 'Warnings and instructions for use'.

PATENT #: EP2805083B